


Brother MFC-L2701DW printer configuration

Step 1: Download Drivers from below URL
Click [Here](#) to download

Step 2:

Support & Downloads

MFC-L2701DW



Not your product?

- Downloads
- FAQs & Troubleshooting
- Manuals
- Consumables & Accessories
- Supported OS
- Specification
- Others(English)

Downloads

OS: Linux (deb) Language: English

Contact Us
Product Registration

Downloads

Printer Driver

Title	Description	Release Date (Version)	Size
Driver Install Tool (2 languages)	The tool will install LPR, CUPSwrapper driver and scanner driver (for scanner ...more	Click to choose (2 languages)	
LPR printer driver (deb package)		12/02/2015 (3.2.0-1)	0.03 MB
CUPSwrapper printer driver (deb package)		12/02/2015 (3.2.0-1)	0.02 MB
Generic LPR printer driver (deb package) (2 languages)		Click to choose (2 languages)	

Driver Install Tool

Select your language.

Language	Release Date (Version)	Size
English	12/03/2014 (2.0.0-1)	0.02 MB
English (China)	12/03/2014 (2.0.0-1)	0.02 MB

Close

3 Read the End-User License Agreement (EULA).


License Agreement

This Agreement provides terms and conditions for license grant from Brother Industries, Ltd ("Brother"), Brother, who owns all copyrights to the software that is distributed with this Agreement ("Software") to recipients thereof ("User"), for use of the Software. User shall have the right to use the Software only in accordance with the terms and conditions of this Agreement. Any use by User of the Software shall be deemed as its agreement hereto.

Note:

Please click on "I Accept" while holding down "Shift" or right click on "I Accept" and select "Save Target

Agree to the EULA and Download

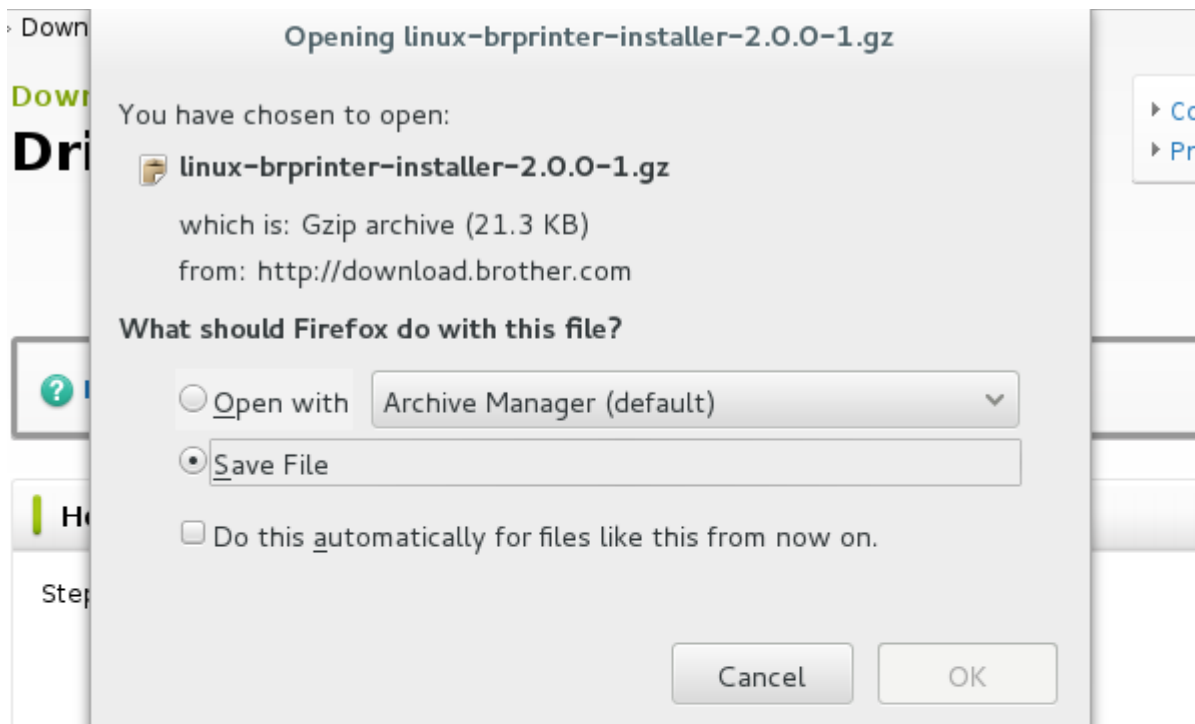

Step2. Open a terminal window and go to the directory you downloaded the file to in the last

Step3. Enter this command to extract the downloaded file:

Command: gunzip linux-brprinter-installer-*.*.*.gz

Step4. Get superuser authorization with the "su" command or "sudo su" command.

Step5. Run the tool:

Command: bash linux-brprinter-installer-*.*.*. Brother machine name


Step6. The driver installation will start. Follow the installation screen directions.

When you see the message "Will you specify the DeviceURI ?",

For USB Users: Choose N(No)

For Network Users: Choose Y(Yes) and DeviceURI.

The install process may take some time. Please wait until it is complete.

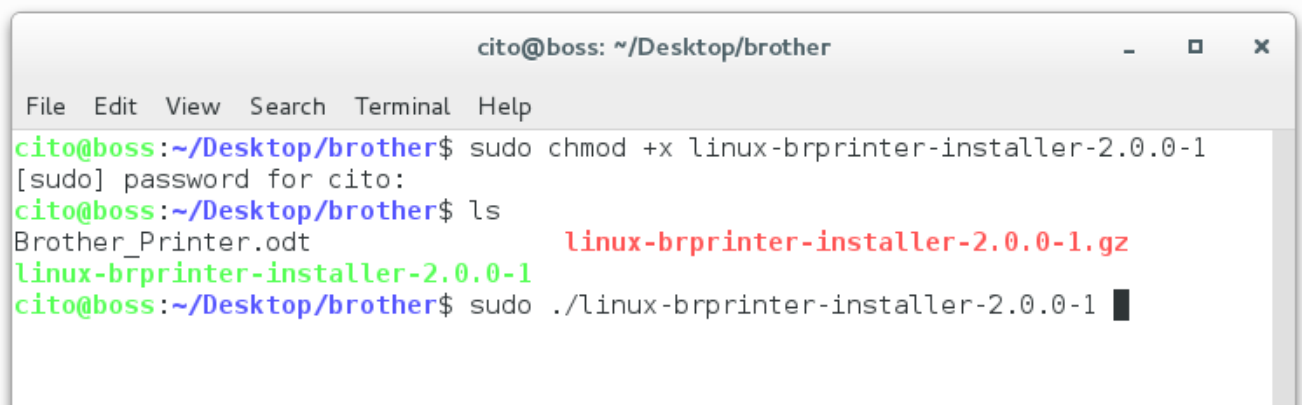

```

cito@boss:~/Desktop/brother$ sudo ./linux-brprinter-installer-2.0.0-1
Input model name ->MFC-L2701DW

You are going to install following packages.
mfcl2700dwlpr-3.2.0-1.i386.deb
mfcl2700dwcupswrapper-3.2.0-1.i386.deb
brscan4-0.4.4-1.i386.deb
brscan-skey-0.2.4-1.i386.deb
OK? [y/N] ->y

```

```

-----
f the possibility of such loss or damage.
Further, Brother shall have no liability to disclose and/or distribute the source
cord of the Software to User under any circumstances. In no case shall the above
license by Brother to modify, alter, translate or otherwise prepare derivative
works of the Software be construed as Brother's implied agreement or undertakings
to disclose and/or distribute the source cord of the Software.
=====
Do you agree? [Y/n] ->y

```

Step 3: The printer is configured automatically. Check test page using printer.

Step 4:

Please change modification when you want to scan a document from normal users when normal user doesn't have admin privileges .

Once installation is completed of both printer & scanner drivers. change respective file also.

Debian 6

1. Open "/lib/udev/rules.d/60-libsane.rules" as a super-user
2. Add the following two lines to the end of the device list. (Before the line "# The following rule will disable ..."):

The lines to be added-----

```

# Brother scanner
ATTRS{idVendor}=="04f9", MODE="0664", GROUP="scanner", ENV{libsane_matched}="yes"

```

3. Restart the OS.

Step 5: Brother printer and scanner configuration has been completed successfully.

=====Brother MFC-L2701DW=====